


## DOWEL AND SPRING PINS

### MS16555

#### DOWEL

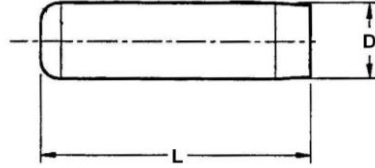


MATERIAL - CRES TYPE 410 OR 416 PER ASTM A582 AND 483  
 FINISH - PASSIVATE PER ASTM A380



DIAMETER	0.063	0.094	0.125
DOUBLE SHEAR LBS/ MIN	610	1000	1800
LENGTH	DASH #	DASH #	DASH #
0.188	601	-	-
0.250	602	-	-
0.313	-	617	-
0.375	-	618	625
0.438	-	619	626
0.500	-	620	627
0.625	-	-	628
0.750	-	-	629

### MS171XXX

#### SLOTTED

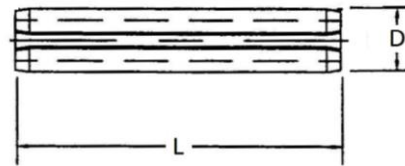

MATERIAL: CRES PER AMS 5506  
 FINISH: PASSIVATE PER AMS 2700



DIAMETER	0.063	0.078	0.094	0.125
DOUBLE SHEAR LBS/ MIN	300	460	720	1500
LENGTH	DASH #	DASH #	DASH #	DASH #
0.188	MS171431	-	-	-
0.250	MS171432	MS171462	MS171492	-
0.313	MS171433	MS171463	MS171493	-
0.375	MS171434	MS171464	MS171494	MS171524
0.438	MS171435	MS171465	MS171495	MS171525
0.500	MS171436	MS171466	MS171496	MS171526
0.563	MS171437	-	MS171497	-
0.625	MS171438	MS171468	MS171498	MS171528
0.750	MS171440	MS171470	MS171500	MS171530
0.875	-	-	-	MS171532
1.000	-	MS171474	MS171504	MS171534
1.250	-	-	-	MS171536