


SELF LOCKING NUTS - HEX FLANGED

MS21042, NAS1291
450 DEG



MATERIAL - CARBON / ALLOY STEEL
FINISH - CADMIUM PER QQ-P-416 TYPE II

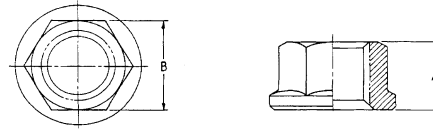

MS21042



MS21042L


MS21042				
DASH #	THREAD SIZE	A DIM	B DIM	TENSILE LBS/MIN
02	2-56	0.090	0.125	660
04	4-40	0.114	0.154	1110
06	6-32	0.128	0.186	1670
08	8-32	0.157	0.217	2490
3	10-32	0.171	0.248	3470
4	1/4-28	0.212	0.310	6200
5	5/16-24	0.259	0.373	9820
6	3/8-24	0.275	0.435	15200
NAS1291				
X7	7/16-20	0.321	0.499	20600
X8	1/2-20	0.380	0.561	27500

DASH #	THREAD SIZE	A DIM	B DIM	TENSILE LBS/MIN
L02	2-56	0.090	0.125	660
L04	4-40	0.114	0.154	1110
L06	6-32	0.128	0.186	1670
L08	8-32	0.157	0.217	2490
L3	10-32	0.171	0.248	3470
L4	1/4-28	0.212	0.310	6200
L5	5/16-24	0.259	0.373	9820
L6	3/8-24	0.275	0.435	15200

L = DRY FILM LUBE PER MIL-N-25027

MS21043
800 DEG

MATERIAL - CRES STEEL PER AMS 5525 (A-286)
FINISH - SILVER PLATE PER AMS 2410

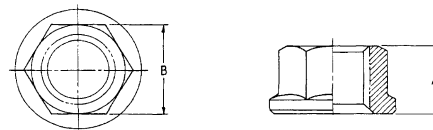

MS21043

DASH	THREAD	A	B	B
04	4-40	0.114	0.154	755
06	6-32	0.128	0.186	1136
08	8-32	0.157	0.217	1720
3	10-32	0.171	0.248	2460
4	1/4-28	0.212	0.310	4580
5	5/16-24	0.259	0.373	7390
6	3/8-24	0.275	0.435	11450